
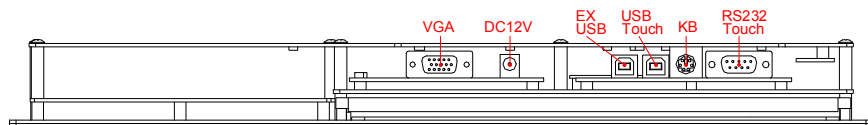
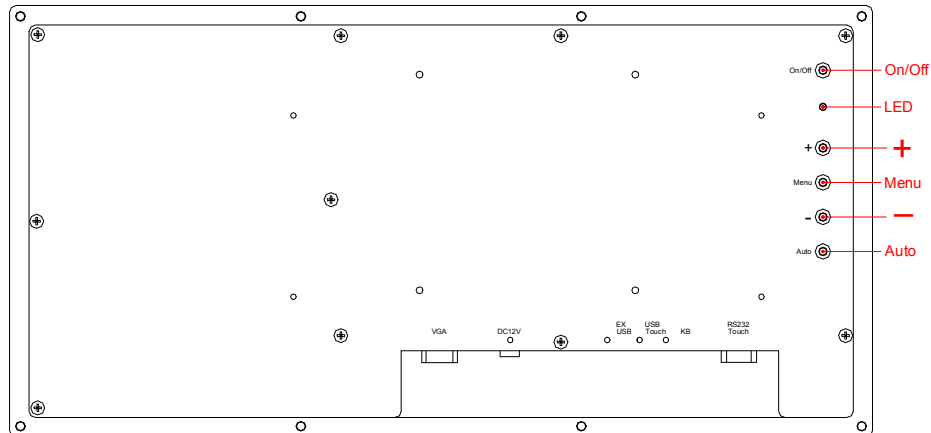




1. Brief

The FD7805T is a 10.4-inch TFT LCD monitor with OSD, touch screen device, and 7*9 matrix keypad. This user's quick reference provides its outlook information and I/O outlets description.

2. Front Panel and Rear Panel Information

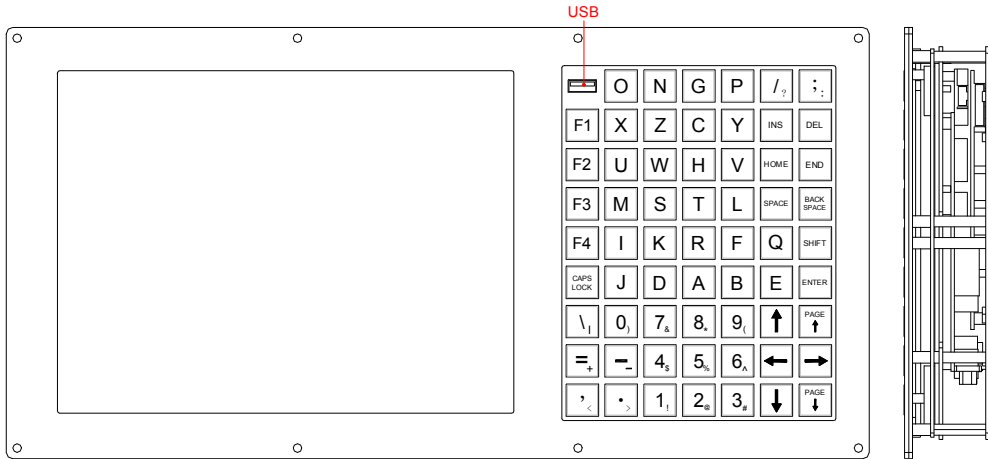

3. Dimensions (in mm) and Rear Panel Information

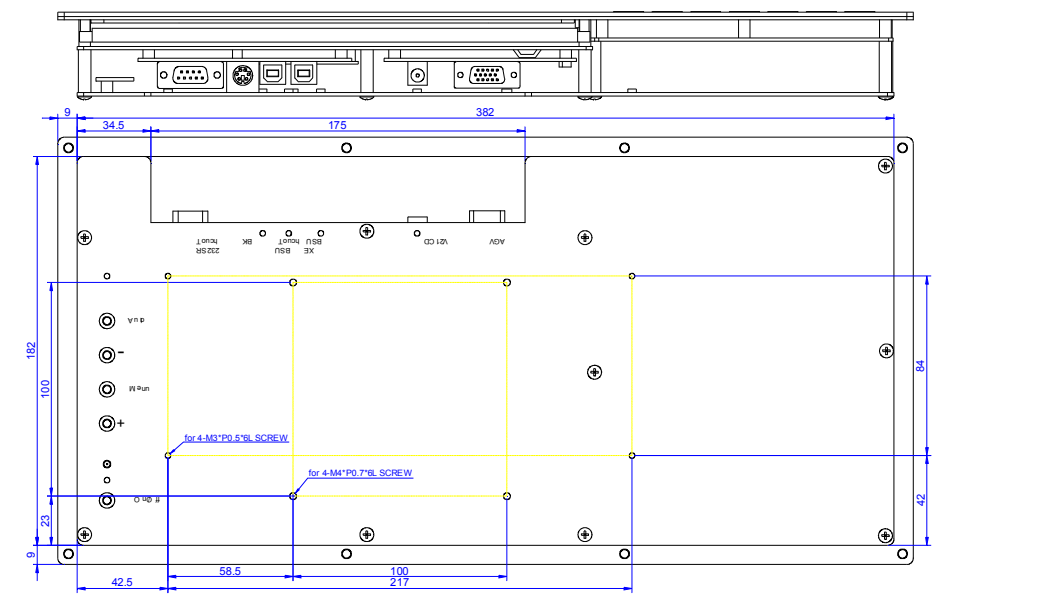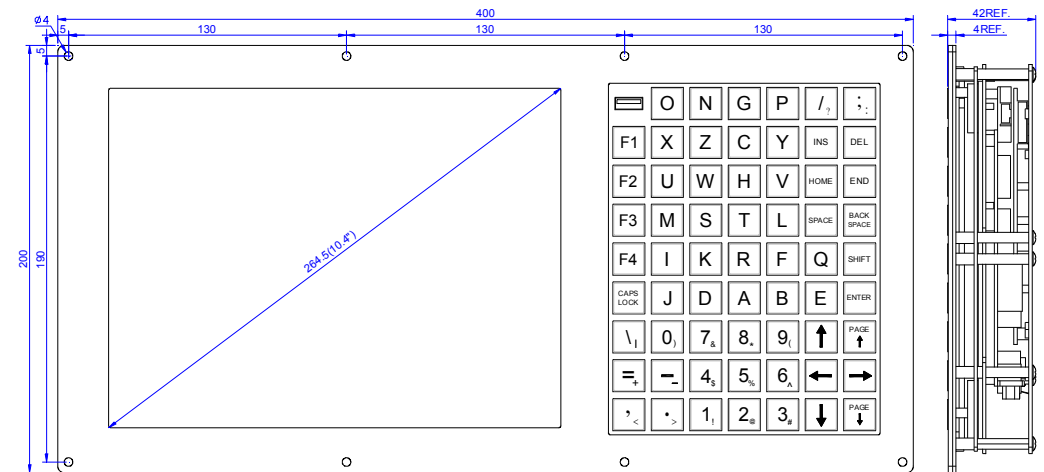

4. Packing List


- 1 FD7805T industrial LCD monitor.
- 1 AC to DC12V power adapter and 1 AC power code cable.
- 1 VGA adaptor cable with 1.8M length.
- 2 USB adapter cable for touch screen and USB host extension.
- 1 PS2 adapter cable for PS2 Keyboard. (Matrix Keypad)
- 1 Compact Disc including user's manual and touch screen drivers.

5. Features

- * Coated metal front panel with 10.4-inch color TFT LCD panel.
- * Supports up to XGA 1024x768 with 16.2M colors.
- * Build-in OSD functions with 62-key matrix keypad.
- * 5-wire analog resistive touch screen device with USB/RS-232 interface.
- * Power requirement: External 100~240V AC adapter, output +12V DC, 1.0A maximum.
- * Weight: 3.1Kg.
- * Dimensions: 42mm(D) x 400mm(W) x 200mm(H)

6. I/O outlets and Keypad

A. Power Connector



B. VGA Connector (15-pin D-sub)

Connects to VGA connector of CPU boards/cards.

C. KB (PS2) Connector (6-pin mini-DIN)

Connect PS2 keyboard connector on CPU boards/cards

D. USB Touch and RS232 Touch Connectors

Connects to USB or RS232 connector on CPU boards/cards


E. EX USB Connector

Connects to USB connector on CPU boards/cards for USB host on keypad.

F. USB Connector

Connects to user's USB devices if necessary.

G. Matrix Keypad

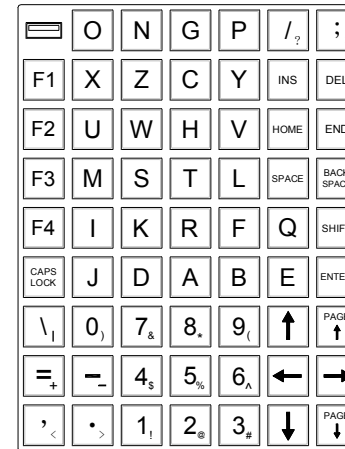


7. Installation

A. Driver Installation

Please refer to the driver installing documentaion in the included Compact Disc for installing proper driver to the touch screen device.

B. Mounting (Cut Out) Dimension

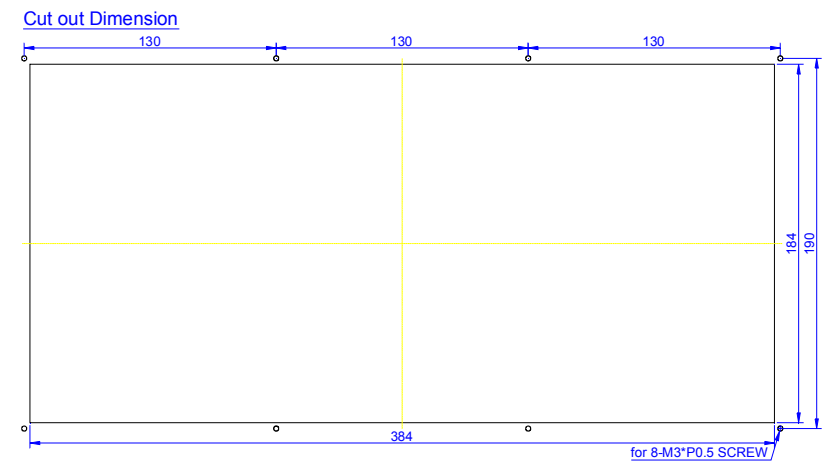

End of Document