


1. Brief

The FB4728x is an easy-to-use SATA to CFAST adapter board. It provides standard 7-pin and 15-pin SATA connector for connecting to SATA connector of CPU cards or main-boards. This quick setting provides the jumper settings, connector location, and their pin assignment.

2. Board Placement

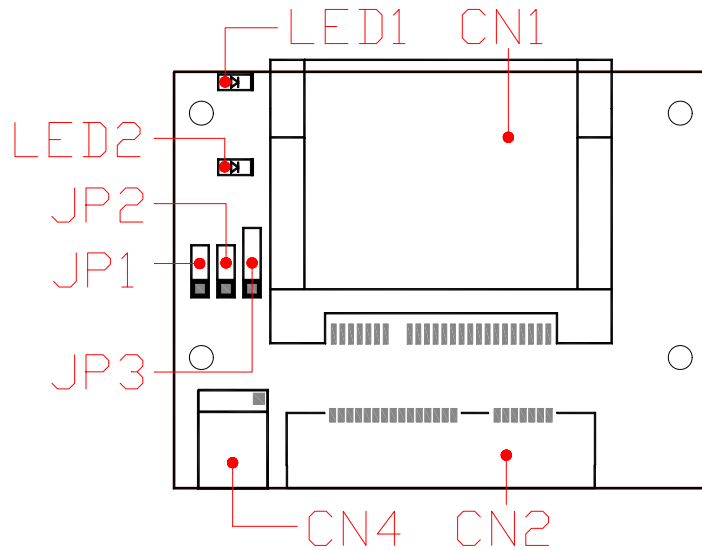

3. Packing List


- 1 FB4728x SATA to CFAST adapter board with anti-static bag.
- 1 hard copies of this quick setup manual.

4. Features

- * 1 CFAST socket for CFAST modules.
- * SATA connectors: 7-pin for signal and 15-pin for power.
- * On-board 5V to 3.3V regulator.
- * On-board LED for access indicator.
- * Board size: 78 mm x 62 mm.

5. Jumpers and Connectors

A. Power Connector (CN4)

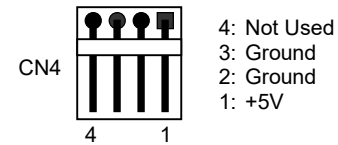

Note that use either CN4 or SATA power connector of CN2 for power source.

B. Access LED (LED1)

LED1 is the on-board access LED, they will flash when accessing the C-Fast.

C. CFAST Socket (CN1)

D. SATA Connector (CN2: 7-pin + 15-pin)

E. Reserved Jumpers and Function (JP1, JP2, and LED2,)

End of Document